

# RCI-1550

## Rated Capacity Indicator



- Designed for the operator
- Suits all crane types
- Extensive loadchart memory
- Comprehensive fault reporting
- Simple calibration techniques
- Datalogging
- Plug-in Cables
- CE Certification pending
- Backlit display for night operation
- Fully tested against temperature, humidity and vibration
- Incorporates anti-two-block
- Multiple load sensing


---

**Safety is no accident.  
Use Robway crane safety equipment.**


### Internationally Recognised Certification

- The RCI-1550 utilises industry-proven external sensors.
- Designed for maximum versatility, the RCI-1550 can monitor up to four load inputs, three angle and three potentiometer style inputs (i.e length, slew etc.)
- Up to eight switch inputs and outputs can be used.
- Central Processing Unit has ample capacity for data storage, such as load charts, calibration and data logging.
- Extensive transient protection testing has been performed to ensure faultless operation under severe climatic conditions such as lightning.
- Functionality can be enhanced by the incorporation of optional modules for special applications.
- The enclosures are suitable for all applications in harsh environments - IS barriers can be added for hazardous area marine applications.
- As the 1550's system is so flexible, please contact a Robway Safety Systems representative for information about configurations for your specific applications. Specifications may vary without notice.
- Conforms to BS7262:1990 and all known legislation requirements world-wide, including Central Europe Norm Standards.

### Tower Crane Configuration (typical)

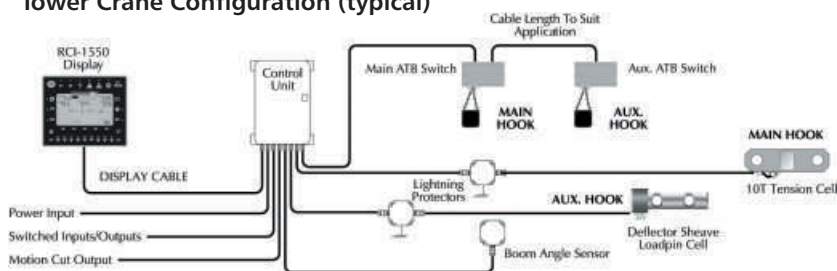

### Telescopic Crane Configuration (typical)

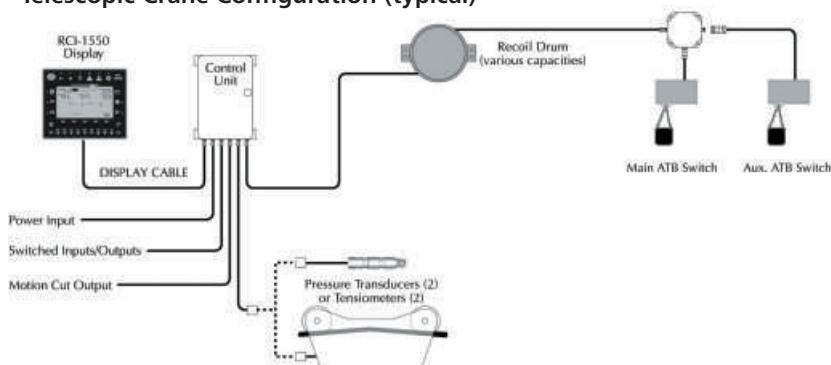

**Robway Safety Systems Pty Ltd**  
ABN 26 007 828 980  
32 West Thebarton Road  
Thebarton South Australia 5031

**Telephone:** +61 8 8352 6055  
**Facsimile:** +61 8 8352 1684  
**Email:** mail@robway.com.au  
**Website:** www.robway.com.au

